COOLING (Continued)

INSTALLATION). Connect the radiator hoses. Refill the cooling system with the correct antifreeze/water mixture (Refer to 7 - COOLING - STANDARD PROCEDURE).

SPECIFICATIONS

TORQUE

DESCRIPTION	N·m	Ft. Lbs.	In. Lbs.
Automatic Belt Tensioner to Mounting Bracket - 2.4L	41	30	-
Bolt, Automatic Belt Tensioner Pulley - 2.4L	61	45	-
Bolt, Block Heater - 2.4L	2	-	17
Bolts, Condenser to Radiator			
Bolts, Coolant Overflow Bottle to Plenum - 2.4L only	8.5	-	75
Electric Fan to Fan Shroud bolts	5.5		50
Bolts, 3.7LFan Blade Assy. to Viscous Drive	23	-	210
Bolts, Fan Shroud to Radiator Mounting	8	-	70
Bolts, Radiator Upper Isolator to Crossmember	9.5	-	85
Bolts, Thermostat Housing - 2.4L	28	-	250
Bolts, Water Pump			
2.4L	12	-	105
4.0l	23	-	200

SPECIAL TOOLS

COOLING

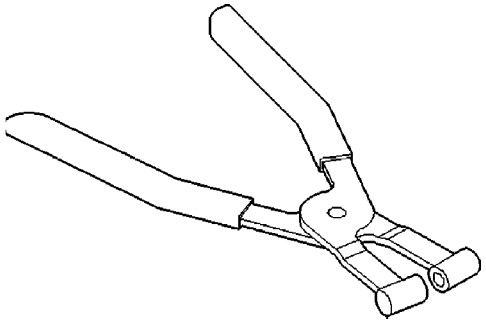

Pliers 6094

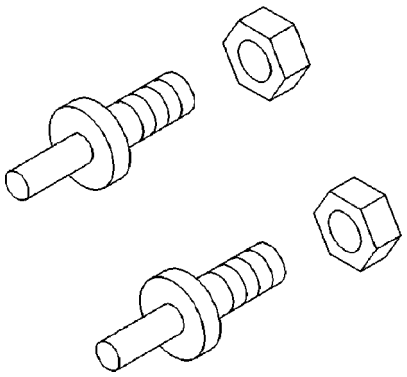

Adapter Pins 8346

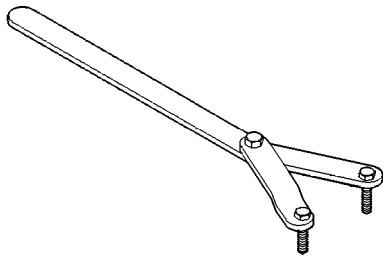

Spanner Wrench 6958 with 8346 adapter pins

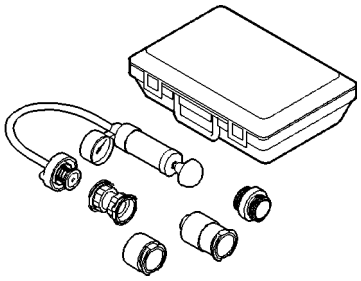

Pressure Tester 7700–A

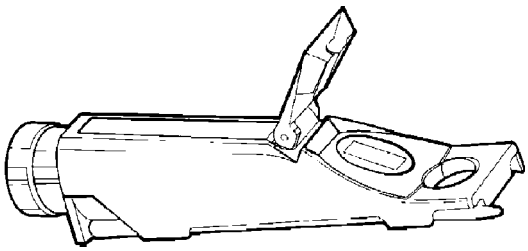

Coolant Refractometer 8286